
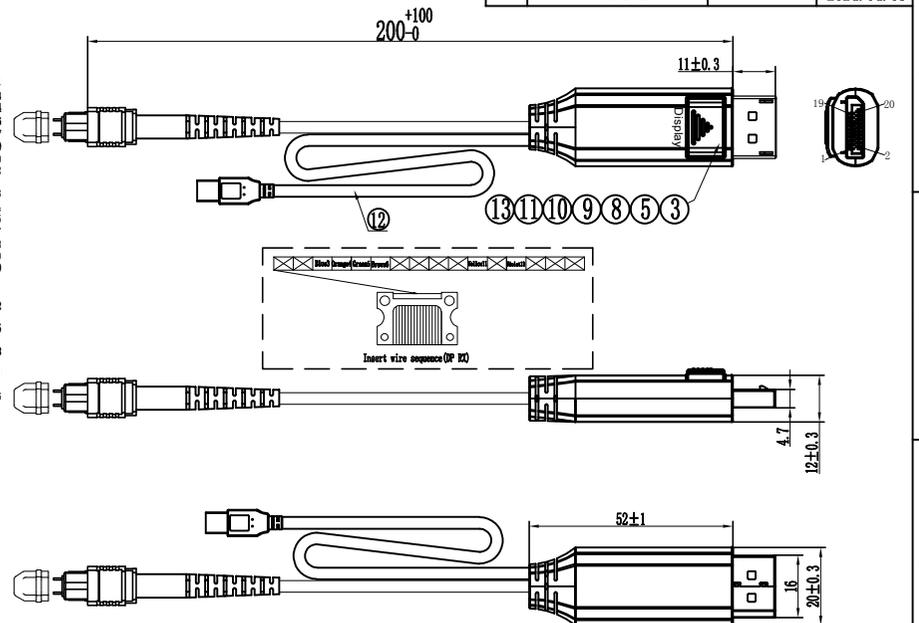
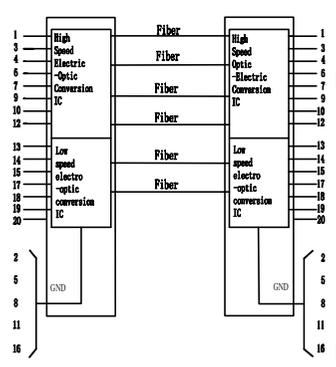



REV	DESCRIPTION	SIGNATURE	DATE
A0	ORIGIN	Zhou Hao Yu	2024.04.08

A
B
C
D
E
F

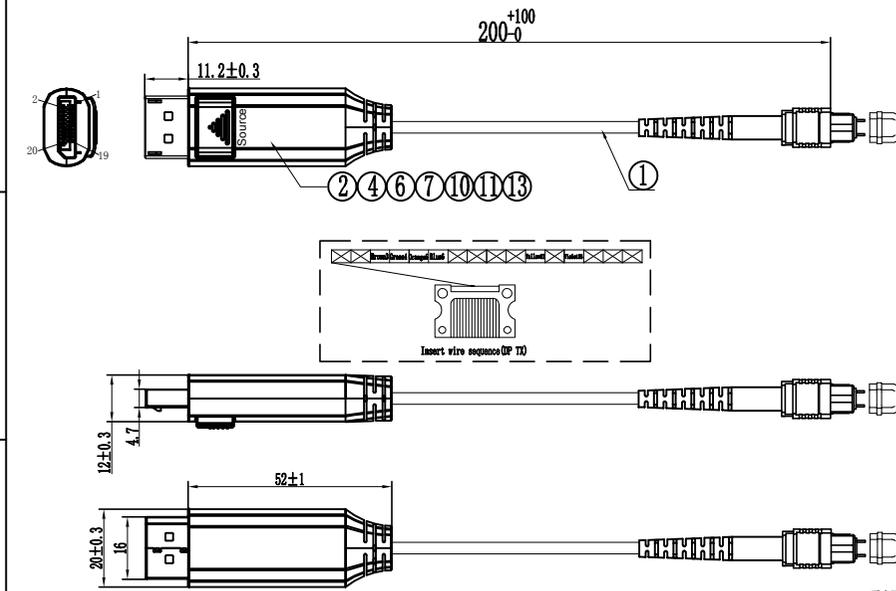


TABLE

P/N	Model No	Customer P/N:	Length (mm)
	SDMP-1400-010		10000+/-200
	SDMP-1400-020		20000+/-300
	SDMP-1400-030		30000+/-400
	SDMP-1400-040		40000+/-500
	SDMP-1400-050		50000+/-1000
	SDMP-1400-060		60000+/-1000
	SDMP-1400-080		80000+/-1000
	SDMP-1400-100		100000+/-1000



ITEM	SPECIFICATION	Q' TY	UNIT
15	Adapter	2	PCS
14	8-Fiber Standard MPO, Polarity Method A	TABLE A	mm
13	MPO/PC Multi-mode Male connector	2	PCS
12	USB power supply cord(45±5cm)	1	PCS
11	SR Black	6	PCS
10	Screw	4	PCS
9	DP Male metal bottom shell(Display)	1	PCS
8	DP Male metal upper shell	1	PCS
7	DP Male metal bottom shell(Source)	1	PCS
6	DP Male metal upper shell	1	PCS
5	DP PCBA (Display)	1	PCS
4	DP PCBA (Source)	1	PCS
3	DP Male Plug Gold-Plated	1	PCS
2	DP Male Plug Gold-Plated	1	PCS
1	DP Optical Cable LSZH OD:3.0mm	2	PCS

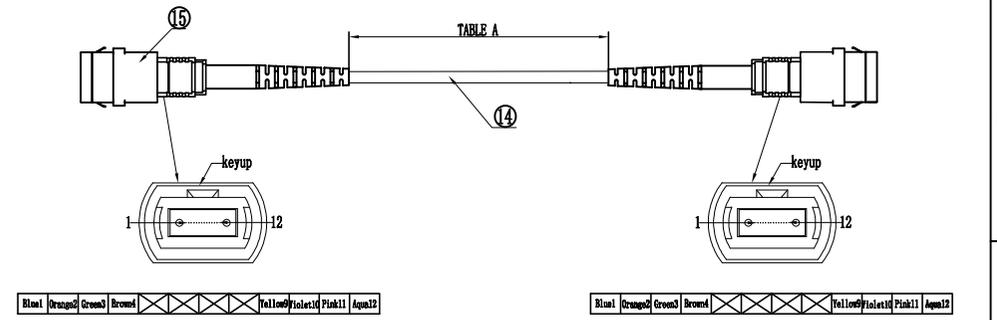

TOLERANCES UNLESS OTHERWISE STATED

X. = ±1
X.X = ±0.25
X.X X = ±0.1

TOOLING DECIMALS ANGLES

X. = ±0.3±1°
X.X = ±0.2±0.5°
X.XX = ±0.1±0.5°

E-Like Industrial (Hong Kong) Limited

TYPE: DP 1.4 Fiber Extender over MPO Optic Cable

DRAW: PART NO:SDMP-1400-TR-LNVS013

CKD: CUSTOMER: UNIT:mm

APP: DWG NO: REV:A0

SHEET:1/1 DATE:2024.04.08