



| REV | DESCRIPTION | SIGNATURE | DATE |
|---|---|---|---|
| A0 | ORIGIN | Zhou Hao Yu | 2024.05.17 |

# TABLE A

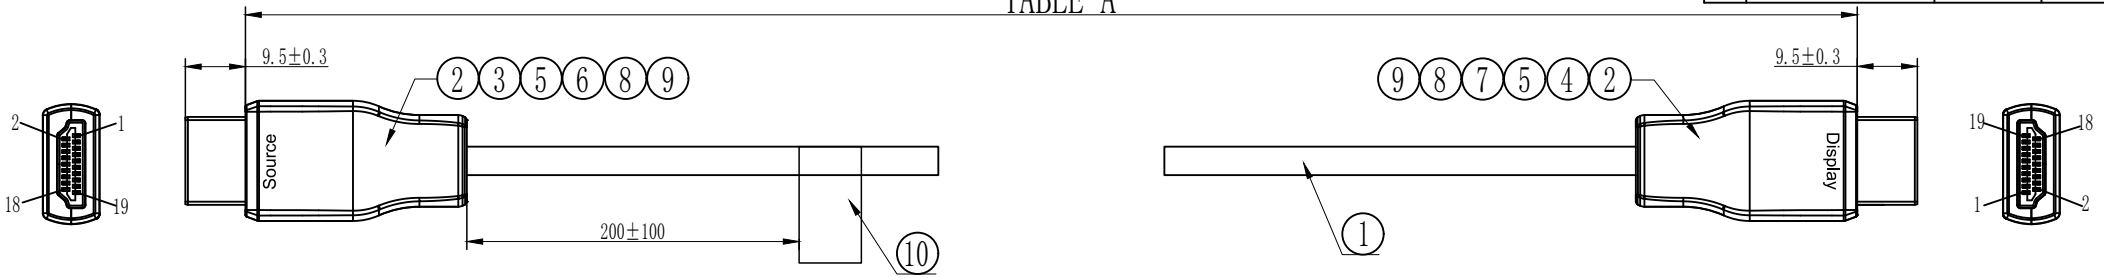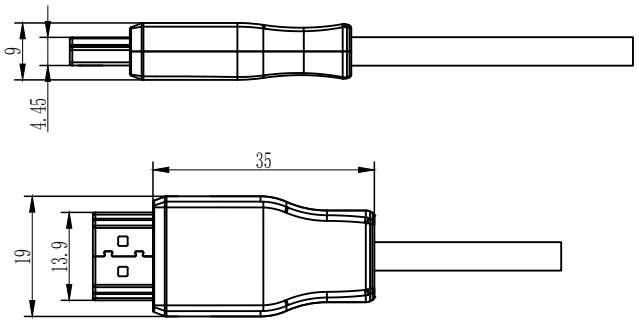

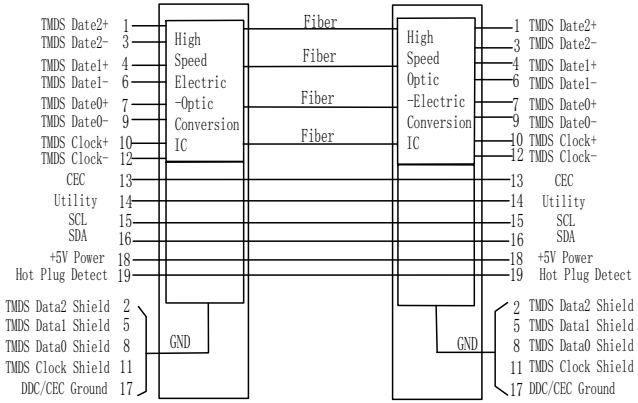


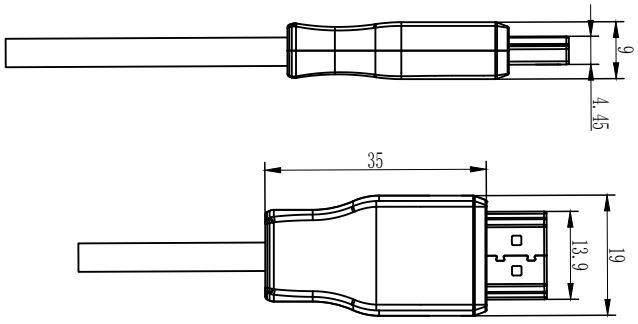

NOTES:

1.100% Display Test:8K@60Hz
2.Support 48Gbps
3.The material meets therequirements of RoHS and Reach

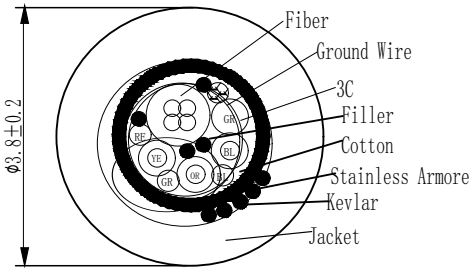


## TABLE A

| P/N | Model No | Customer P/N: | Length(mm) |
|---|---|---|---|
| | SSAC-9860-005 | | 5000+/-200 |
| | SSAC-9860-0075 | | 7500+/-200 |
| | SSAC-9860-010 | | 10000+/-200 |
| | SSAC-9860-015 | | 15000+/-250 |
| | SSAC-9860-020 | | 20000+/-300 |
| | SSAC-9860-025 | | 25000+/-350 |
| | SSAC-9860-030 | | 30000+/-400 |

| ITEM | SPECIFICATIONS | Q'TY | UNIT |
|---|---|---|---|
| 10 | QR Code | 1 | PCS |
| 9 | Screw | 4 | PCS |
| 8 | Cable Clips | 2 | PCS |
| 7 | HDMI A Male Shell(Bottom) Shiny Black (Display) | 1 | PCS |
| 6 | HDMI A Male Shell(Bottom) Shiny Black (Source) | 1 | PCS |
| 5 | HDMI A Male Shell(Upper) Shiny Black | 2 | PCS |
| 4 | HDMI A PCBA (Display) | 1 | PCS |
| 3 | HDMI A PCBA (Source) | 1 | PCS |
| 2 | HDMI A Male Plug Gold-plated | 2 | PCS |
| 1 | 32AWG*4C+34AWG*3C+Fiber+F+AL+Stainless Steel Armor+F OD:3.8±0.2mm TPU BLACK | TABLE A | mm |

TOLERANCES UNLESS OTHERWISE STATED

| | |
|---|---|
| X. | =±1 |
| X.X | =±0.25 |
| X.X X | =±0.1 |

TOOLING DECIMALS ANGLES

| | |
|---|---|
| X. | ±0.3±1° |
| X.X | ±0.2±0.5° |
| X. XX | ±0.1±0.5° |

# E-Like Industrial(Hong Kong)Limited

| | | |
|---|---|---|
| TYPE: | Super Slim Armored HDMI 8K A-A Active Optical Cable | |
| DRAW: | PART NO: SSAC-9860-XXX-144 | |
| CKD: | CUSTOMER: | UNIT:mm |
| APP: | DWG NO: | REV:A0 |
| SHEET:1/1 | | DATE: 2024.05.17 |