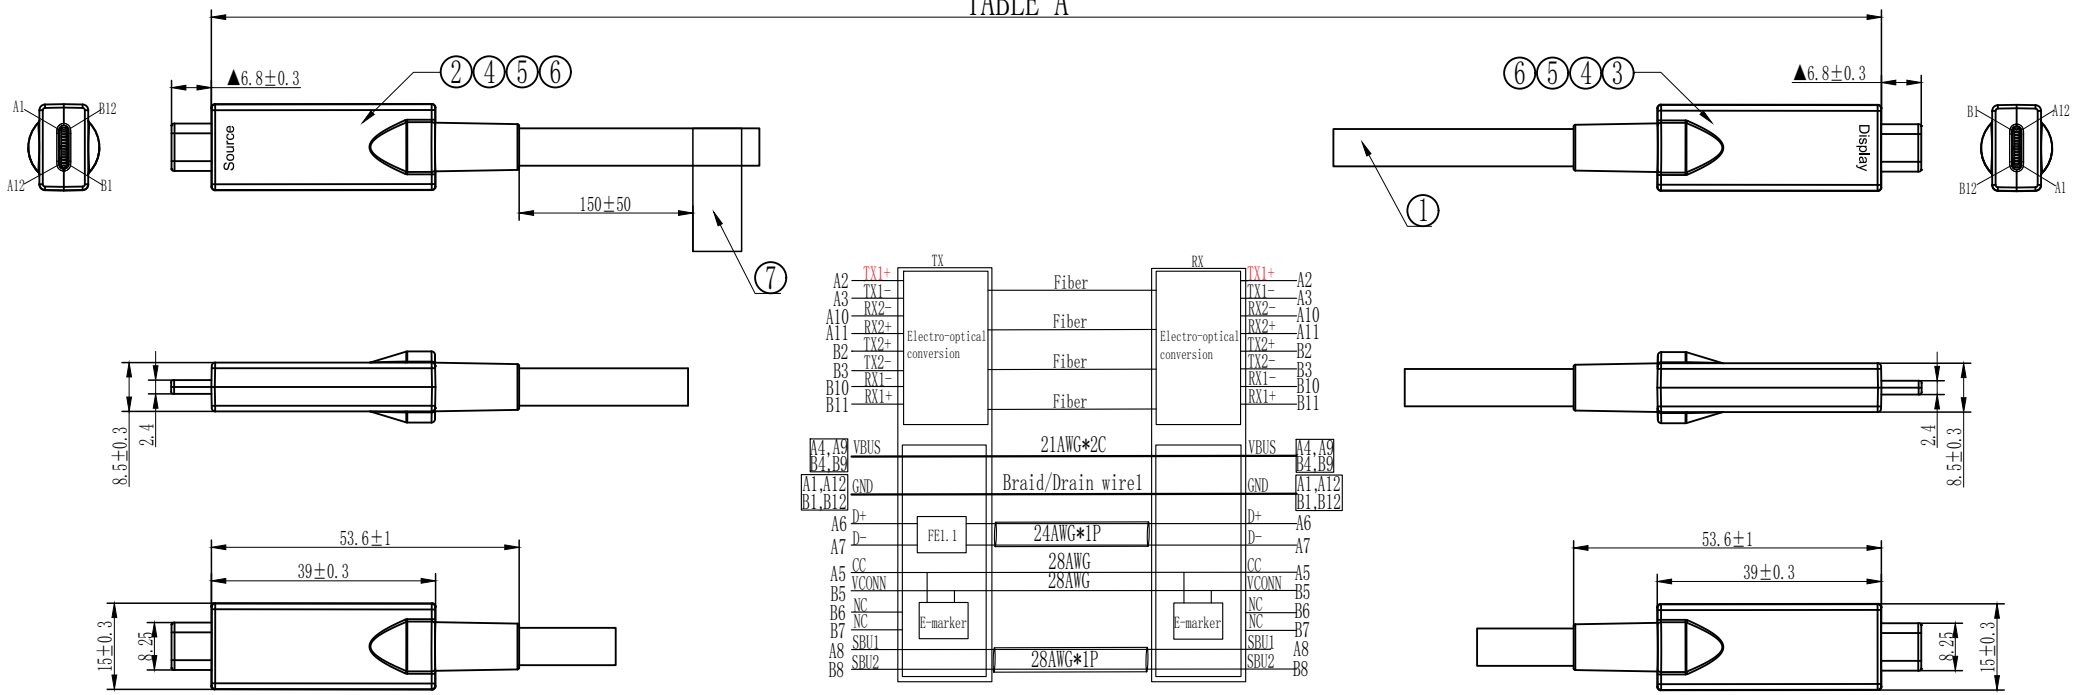
Critical Dimensions denoted by the symbol"▲"

REV	DESCRIPTION	SIGNATURE	DATE
A0	ORIGIN	Xiting Huang	2026.07.16

TABLE A



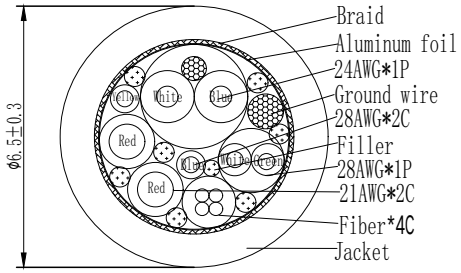


TABLE A

P/N	Model No	Customer P/N:	Length(mm)
	SCFC-3120-005		5000+/-200
	SCFC-3120-008		8000+/-200
	SCFC-3120-010		10000+/-200
	SCFC-3120-015		15000+/-250

Note:

1. Support DP 2 lane 4K@60Hz video transmission ;
2. Support USB 3.2 Gen 2 10Gbps Data transmission ;
3. Backwards USB 2.0 & USB 1.1 ;
4. Support PD 60W (20V 3A) Power Delivery ;
5. The material meets the requirements of RoHS.

ITEM	SPECIFICATIONS	Q'TY	UNIT
7	EB00042 Label	1	PCS
6	CW00091 SR Black	2	PCS
5	CX01452 Type C/M Zinc-Alloy Top Cover Matte Black	2	PCS
4	CX01451 Type C/M Zinc-Alloy Bottom Cover Matte Black	2	PCS
3	MU00162 Type C/M RX Module(Connector Shell Gold Plated)	1	PCS
2	MU00161 Type C/M TX Module(Connector Shell Gold Plated)	1	PCS
1	DE00009 (24AWG*1P+D+AL+HM)*1+28AWG*1P+21AWG*2C+28AWG*2C+(50/125um FIBER*4C)+F+D+AL+B Black TPE OD=6.5±0.25mm	TABLE A	mm

TOLERANCES UNLESS OTHERWISE STATED

X.	=±1
X.X	=±0.25
X.X X	=±0.1

TOOLING DECIMALS ANGLES

X.	±0.3±1°
X.X	±0.2±0.5°
X. XX	±0.1±0.5°

E-Like Industrial(Hong Kong)Limited

TYPE: USB 3.2 Gen2 & DP1.4 Hybrid Type-C Active Optical Cable

DRAW:	PART NO: SCFC-3120-XXX-LUX029	
CKD:	CUSTOMER:	UNIT:mm
APP:	DWG NO:	REV:A0
SHELL:1/1		DATE:2026.07.16