
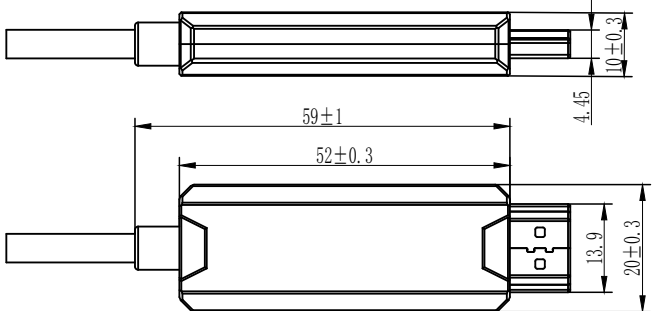
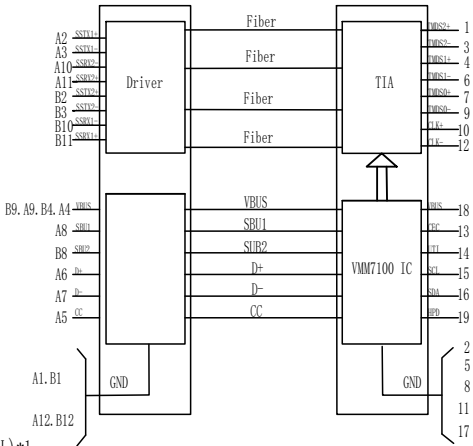
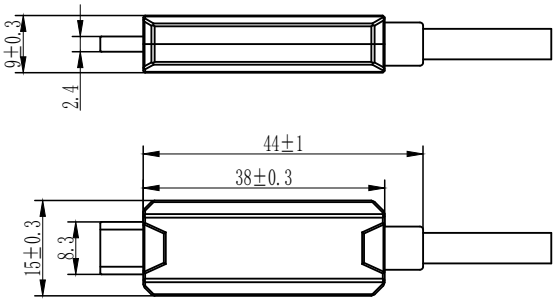


Critical Dimensions denoted by the symbol "▲"

REV	DESCRIPTION	SIGNATURE	DATE
A0	ORIGIN	Shixuan Pan	2026.06.10

TABLE A

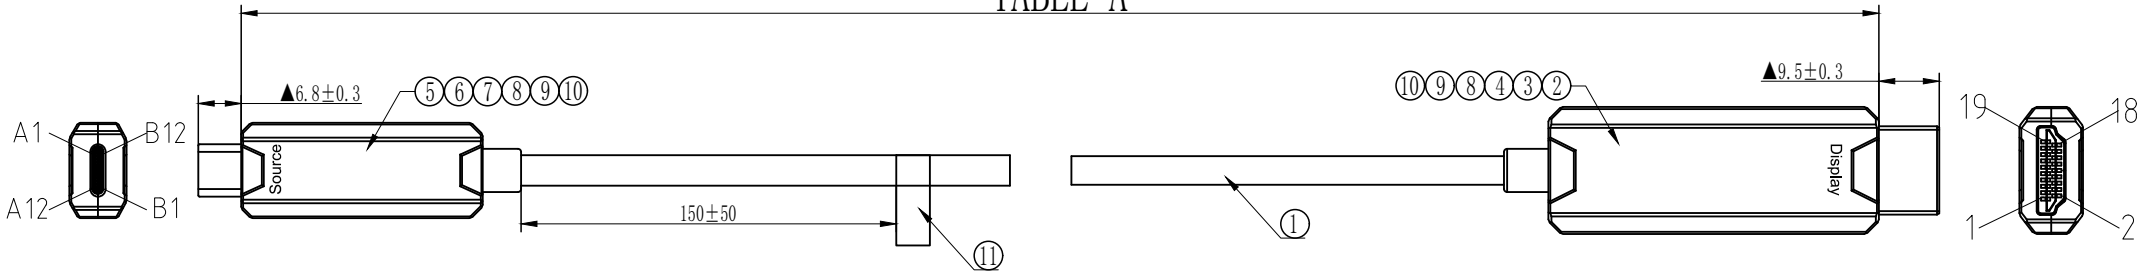

- NOTES:
1. 8K@60Hz
 2. Support 48Gbps
 3. The Material meets the requirements of RoHS

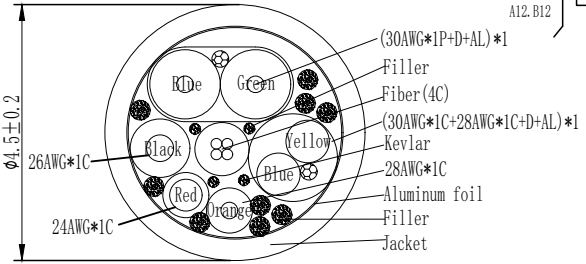


TABLE A

P/N	Model No	Customer P/N:	Length(mm)
	SCTH-1200-010		10000+/-200
	SCTH-1200-015		15000+/-250
	SCTH-1200-020		20000+/-300
	SCTH-1200-025		25000+/-350
	SCTH-1200-030		30000+/-400

ITEM	Label	Q'TY	UNIT
11	Label	1	PCS
10	Screw	4	PCS
9	Clip	2	PCS
8	SR Black	2	PCS
7	USB Type C Zinc-Alloy Top Cover Black	1	PCS
6	USB Type C Zinc-Alloy Bottom Cover Black	1	PCS
5	USB Type C Module(Connector Shell Gold Plated)	1	PCS
4	HDMI A/M Zinc-Alloy Top Cover Black	1	PCS
3	HDMI A/M Zinc-Alloy Bottom Cover Black	1	PCS
2	HDMI A/M Module(Connector Shell Gold Plated)	1	PCS
1	HDMI AOC (4 Fiber+7 Copper) Black PVC OD:4.5±0.2MM	TABLE A	mm

TOLERANCES UNLESS OTHERWISE STATED
X. =±1
X. X =±0.25
X. X X =±0.1
TOOLING DECIMALS ANGLES
X. ±0.3±1°
X. X ±0.2±0.5°
X. XX ±0.1±0.5°

E-Like Industrial(Hong Kong)Limited			
TYPE: USB Type C TO HDMI Active Optical Cable			
DRAW:		PART NO: SCTH-1200-XXX	
CKD:		CUSTOMER:	
APP:		DWG NO:	
SHEET:1/1		DATE:2026.06.10	