
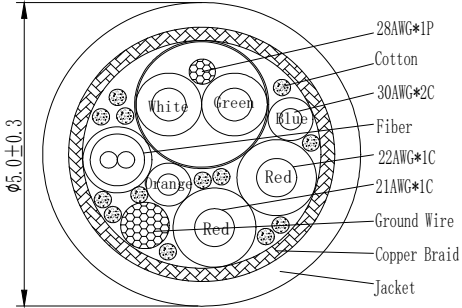
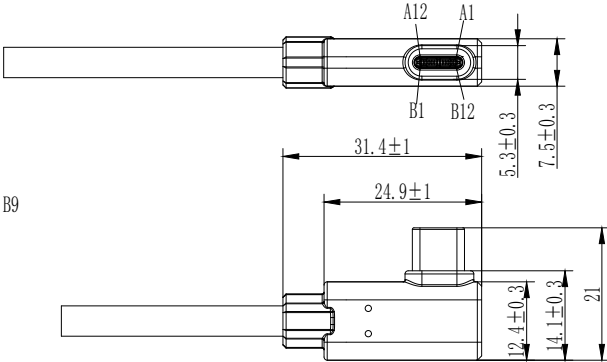
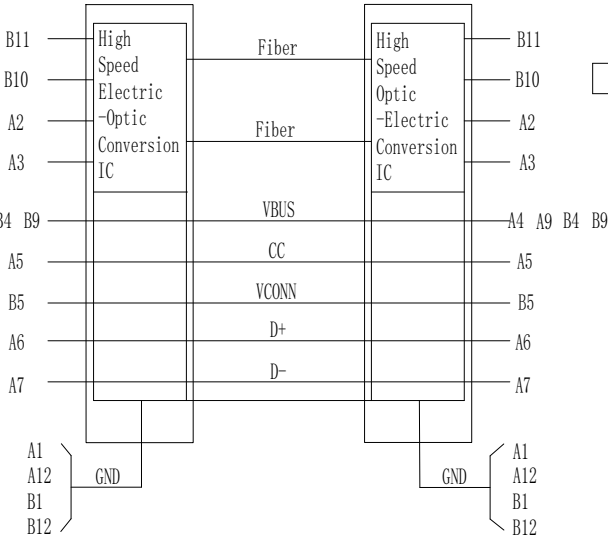
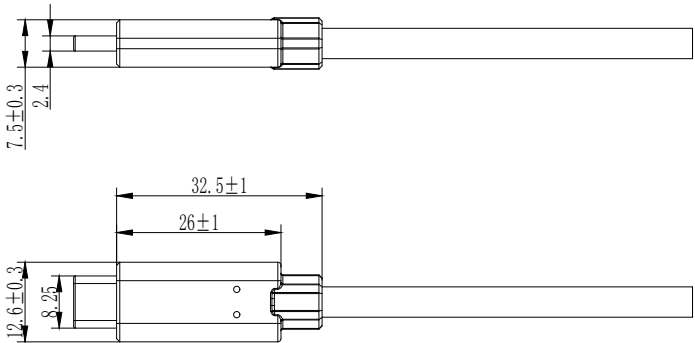
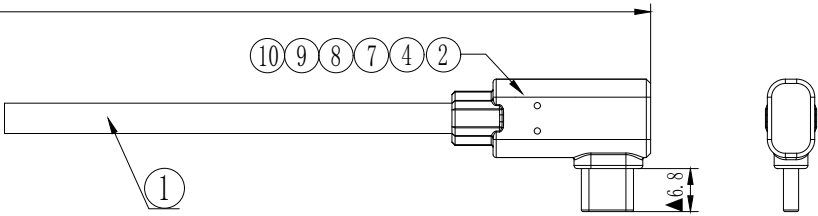


REV	DESCRIPTION	SIGNATURE	DATE
A0	ORIGIN	Xiong Chi	2025.09.11

TABLE A

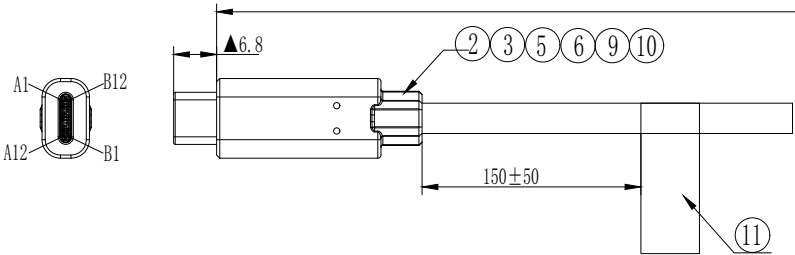

- NOTES:
- Support USB 3.2 Gen 2x1 10Gbps Data transmission ;
 - Support PD 60W (20V 3A) Power Delivery;

TABLE A

P/N	Model No	Customer P/N:	Length(mm)
	SVRC-3120-005		5000+/-200
	SVRC-3120-007		7000+/-200
	SVRC-3120-010		10000+/-200

11	QR code	1	PCS
10	Overmold(45P Black PVC)		
9	Inner Mold		
8	Tinplate Bottom Shell(Right-Angle)	1	PCS
7	Tinplate Upper Shell(Right-Angle)	1	PCS
6	Tinplate Bottom Shell(straight)	1	PCS
5	Tinplate Upper Shell(straight)	1	PCS
4	USB Type C Right-Angle PCBA	1	PCS
3	USB Type C PCBA	1	PCS
2	USB Type C Male Nickel Plating	2	PCS
1	(28AWG*1P+D+AL)*1+30AWG*2C+22AWG*1C+21AWG*1C+Fiber+F+2D+B Black PVC OD5.0MM	TABLE A	mm
ITEM	SPECIFICATIONS	Q'TY	UNIT

	TOLERANCES UNLESS OTHERWISE STATED
X.	=±1
X.X	=±0.25
X.XX	=±0.1
	TOOLING DECIMALS ANGLES
X.	±0.3±1°
X.X	±0.2±0.5°
X.XX	±0.1±0.5°

E-Like Industrial(Hong Kong)Limited			
TYPE: USB 3.2 Gen2x1 Type-C to Type-C Active Optical Cable (10Gbps, Straight to Right-Angle)			
DRAW:		PART NO: SVRC-3120-XXX-S159M-T/S159M-R	
CKD:		CUSTOMER:	UNIT:mm
APP:		DWG NO:	REV:A0
SHEET:1/1			DATE:2025.09.11